
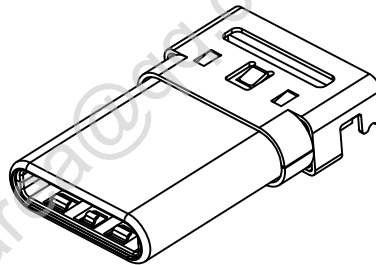
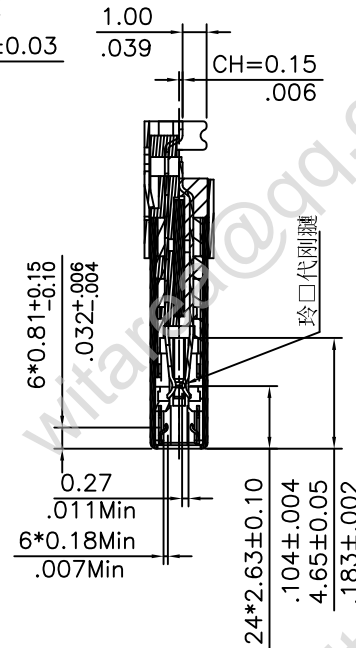
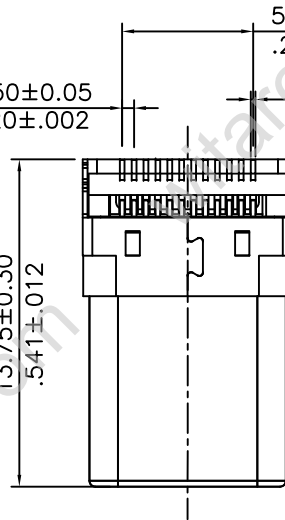
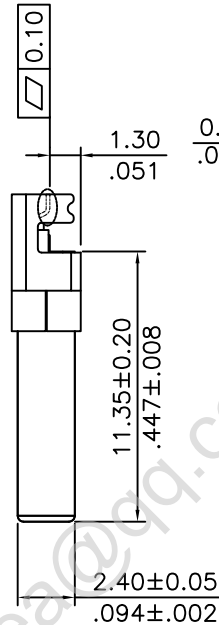
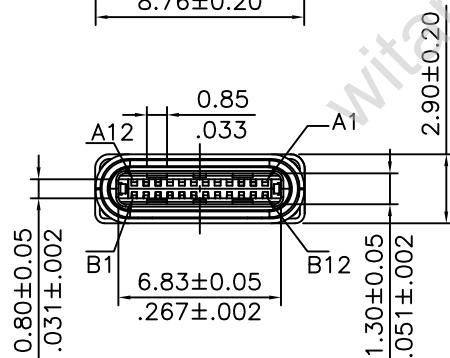
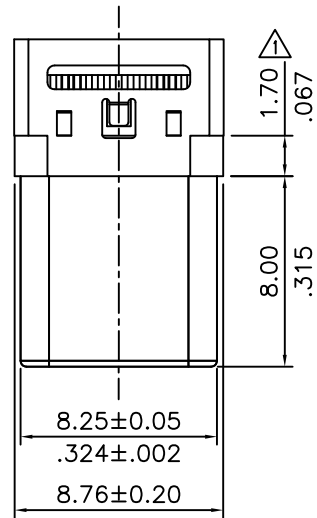


MATERIAL:

- 1.HOUSING: LCP, GLASS FIBER FILLED, BK
- 2.CONTACT: COPPER ALLOY (t=0.15mm).
- 3.GUARD PLATE:STAINLESS STEEL,T=0.10mm
- 4.SHIELD: STAINLESS STEEL (t=0.20mm).

FINISH:

CONTACT: SEE ORDER INFORMATION
SHELL: NICKEL PLATING
SALT SPRAY : 48H



- ① Series No.
- ② No. of Circuits
- ③ P=Plug
- ④ Plating option:


A= Gold Flash plated on Contact area,
80u" Min. Matte Tin plated on Solder tails,
50u" Min. Nickel underplating over all
B= 15u" gold plated on Contact area,
80u" Min. Matte Tin plated on Solder tails,
50u" Min. Nickel underplating over all
C= 30u" gold plated on Contact area,
80u" Min. Matte Tin plated on Solder tails,
50u" Min. Nickel underplating over all
E= 1u" gold plated on Contact area,
80u" Min. Matte Tin plated on Solder tails,
50u" Min. Nickel underplating over all

- ⑤ Contact tail style:
M= Middle mount Right angle
- ⑥ Insulator Color: 1= LCP Black
- ⑦ Contact + Shell solder tail style:
B= Contact SMT Shell DIP
- ⑧ Contact Material: F= Copper Alloy
- ⑨ PCB Style: 0= Without PCB
- ⑩ Packing R= Tape & Reel
- ⑪ -LF= For Lead Free IR Reflow Process

Lead Free Process

RoHS compliant

4					DATE	UNIT: mm / inch	TITLE: U.S.B TYPE C PLUG SMT MIDDLE MOUNT RIGHT ANGLE	Shenzhen Witarea Technology Co., LTD.			
3				DRAWN BY:	MARK	MARK					
2				ENGINEER:	MARK		MATERIAL:	DRAWING NO.	W0025-24-MM1-S1	PART NO.	W0025-24-MM1-S1
1	MARK	2018/4/25	REVISIONS STRUCTURE ADD SIZE CONTROL	CHECKED BY:			FINISH:	SCALE	3 / 1	SHEET	1 OF 3
SYM	NAME	DATE	REVISIONS	APPROVED BY:							

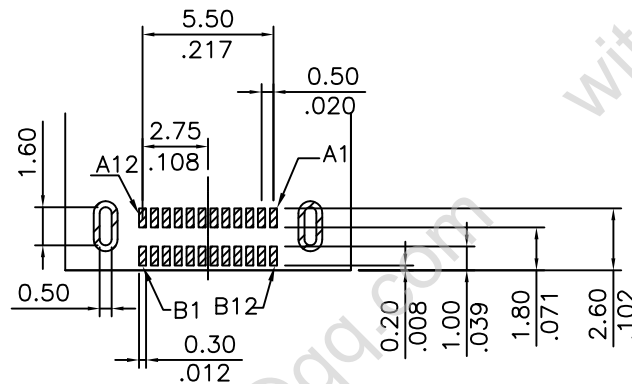

RECOMMENDED P.C.B. LAYOUT
T=0.80(.031) OR 1.00(.040)mm
TOLERANCE UNSPECIFIED ± 0.05 mm

USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS

PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2	SSTXp1	Positive half of first SuperSpeed TX differential pair	B11	SSRXp1	Positive half of first SuperSpeed RX differential pair
A3	SSTXn1	Negative half of first SuperSpeed TX differential pair	B10	SSRXn1	Negative half of first SuperSpeed RX differential pair
A4	Vbus	Bus Power	B9	VBUS	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use(SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SBU1	Sideband Use(SBU)	B5	CC2	Configuration Channel
A9	VBUS	Bus Power	B4	VBUS	Bus Power
A10	SSRXn2	Negative half of second SuperSpeed RX differential pair	B3	SSTXn2	Negative half of second SuperSpeed TX differential pair
A11	SSRXp2	Positive half of second SuperSpeed RX differential pair	B2	SSTXp2	Positive half of second SuperSpeed TX differential pair
A12	GND	Ground return	B1	GND	Ground return

Lead Free Process

RoHS compliant

4					DATE	UNIT: mm / inch	TITLE: U.S.B TYPE C PLUG SMT MIDDLE MOUNT RIGHT ANGLE	Shenzhen Witarea Technology Co., LTD.			
3				DRAWN BY:		TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:				
2				ENGINEER:		.X $\pm 0.25/.010$ X' $\pm 4'$	FINISH:	DRAWING NO.	W0025-24-MM1-S1	PART NO.	W0025-24-MM1-S1
1				CHECKED BY:		.XX $\pm 0.20/.008$ X' $\pm 2'$		SCALE	3 / 1	SHEET	2 OF 3
SYM	NAME	DATE	REVISIONS	APPROVED BY:							




由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

NOTE :

- * Reel Material : HIPS
- * Carrier Material : Black, Conductive Polystyrene Alloy
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : 0.1N – 1.3N
- * Carrier camber is within 1mm in 250mm
- * All dimensions meet EIA-481-B requirements.
- * Quantity : 1000 PCS/Reel

Dimension				Packing (Reel/Carton)
E	W1	W2	W3	
24.0(.945)	24.5(.965)	30.5(1.201)	24.5(.965)	10

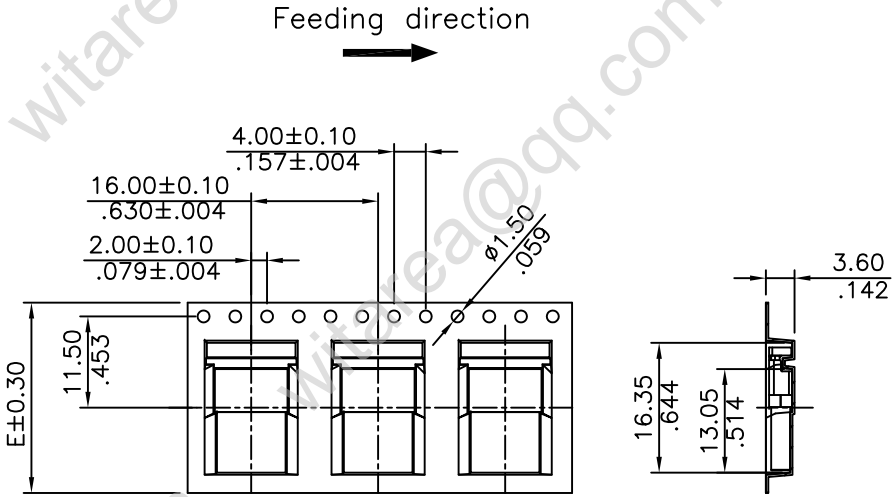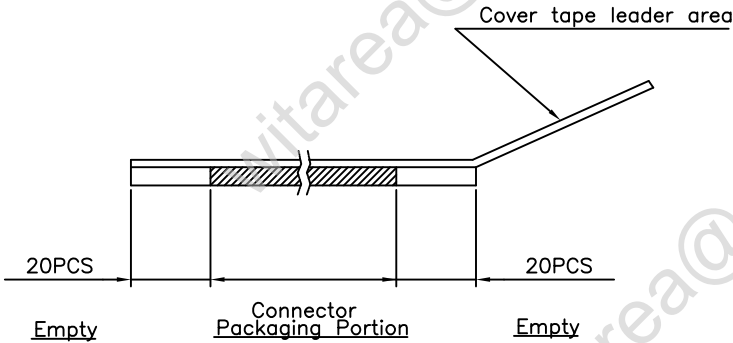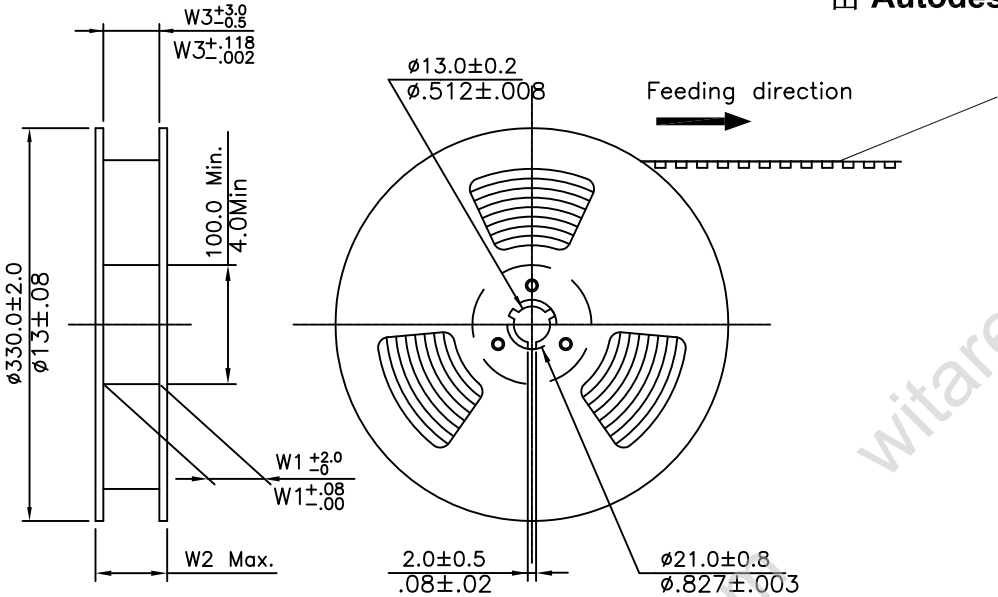

WIDTH : 24 mm Carrier

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: U.S.B TYPE C PLUG SMT MIDDLE MOUNT RIGHT ANGLE	Shenzhen Witarea Technology Co., LTD.			
3				DRAWN BY:		TOLERANCE UNLESS OTHERWISE SPECIFIED					
2				ENGINEER:		.X ±	X' ± 1'	MATERIAL:	DRAWING NO.	W0025-24-MM1-S	PART NO.
1				CHECKED BY:		.XX ±	.X' ±	FINISH:	W0025-24-MM1-S1	1	
SYM	NAME	DATE	REVISIONS	APPROVED BY:				SCALE		SHEET	3 OF 3

由 Autodesk 教育版产品制作