

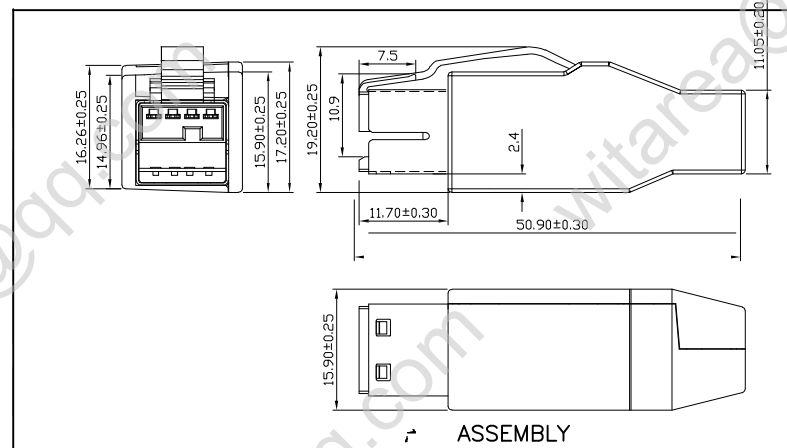
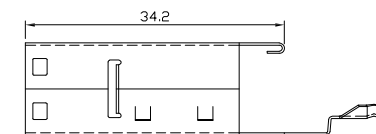







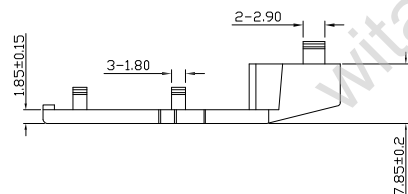
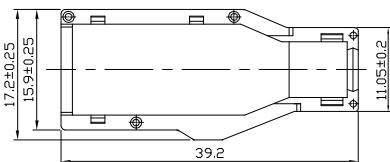


DRAWING FOR
CUSTOMER




RoHS

Compliant
2002/95/EC



ASSEMBLY



成型后尺寸

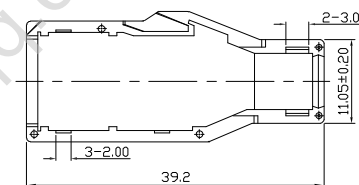



TABLE 1:


Y	COLOR
0	GREY
1	BLACK
2	DEEP GREY

ELECTRICAL:
ELECTRICAL CHARACTERISTICS:
RATINGS: 3.0A
CONTACT RESISTANCE:
30mΩ Max.(initial)
400mΩ Max.(After life test)
INSULATION RESISTANCE:≥1000MΩ Min
DIELECTRIC STRENGTH:
750V AC/1 minute.
MECHANICAL:
INSERTION FORCE:6.6kgf MAX
WITHDRAWAL FORCE:1.0kgf MIN

NOTE:All materials conform
ROHS standard.

深圳市纬域科技有限公司
SHENZHEN WITAREA TECHNOLOGY CO.,LTD

TOLERANCE:
X. ±0.40
X.X ±0.35
X.XX ±0.25
X.XXX ±0.15
X° ±1° X.X° ±0.05°



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :
Andy Yang

CHECKED BY:

APPROVED BY:

DATE :
2017. 08. 01

DATE :

DATE :

PART NAME:
POWER USB Male Plug 8P (φ6.5)24V

PART NO. W0010-8-CA-S5

MOLD NO.

REMARK

DRAW NO.