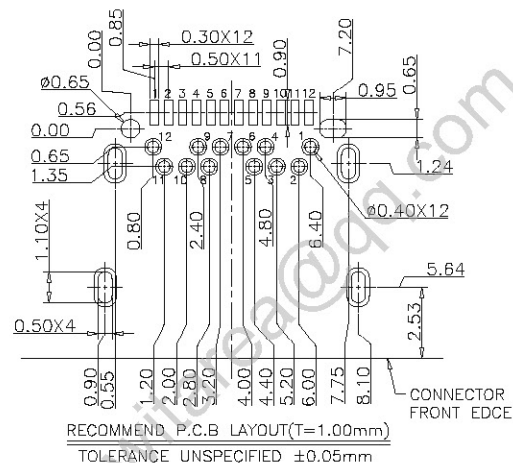
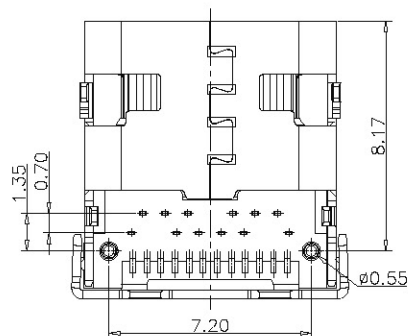
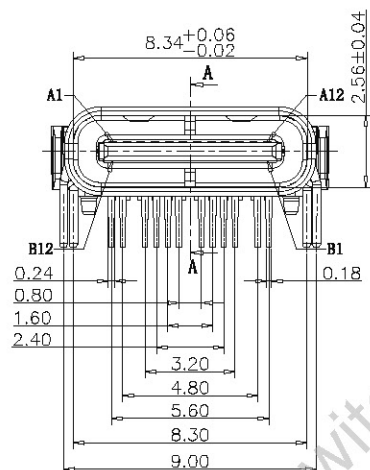



SECTION A-A
SCALE 1:1

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

TYPE:

6	SHELL	SUS304 T=0.30mm	NICKEL 30u" MIN PLATING	1PCS	
5	EMI	SUS304 T=0.10mm	CLEAR ONLY	2PCS	
4	SHIELDING PLATE	SUS301 T=0.15mm	CLEAR ONLY	1PCS	
3	SMT CONTACT	C18400-H T=0.12mm	NI 50u" MIN. UNDER PLATING OVER ALL. AU PLATED ON THE FUNCTIONAL AREA OF CONTACT. PLATING GF OF THE SOLDER AREA	1SET	
2	DIP CONTACT	C18400-H T=0.12mm	NI 50u" MIN. UNDER PLATING OVER ALL. AU PLATED ON THE FUNCTIONAL AREA OF CONTACT. PLATING GF OF THE SOLDER AREA	1SET	
1	HOUSING	LCP UL94V-0	BLACK	1PCS	
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY	

PART NO.:
SEE THE PART NUMBER CODE

深圳市纬域科技有限公司
SHENZHEN WITAREA TECHNOLOGY CO., LTD

DRAWN BY	DATE
ANDY YANG	2022.06.19

1B0L	0	GENERAL TOLERANCES (UNLESS SPECIFIED)
------	---	--

TITLE
TYPE C 3.1/3.2 24PIN RECEPTACLE , TOP-MOUNT, DIP+SMT,CH=3.31MM,L=9.87MM, SOLDER TAB=1.8MM

CHECKED BY	DATE
JAMES XIAO	2022.06.19

QUALITY SYMBOL	X,XXXX	+	---
▲ = 0	X,XXX	±	0.10
	X,XX	±	0.20
	X,X	±	0.30
	ANGLE AP	+	--

DWG.NO.	W0026-24-TM3-S5
---------	-----------------

SHEET NO.
1 OF 1

APPROVED BY	DATE
JASON ZENG	2022.06.19

DIMENSION STYLE
MM ONLY

DESIGN UNITS
METRIC

SCALE
1:1



THIRD ANGLE
PROJECTION