
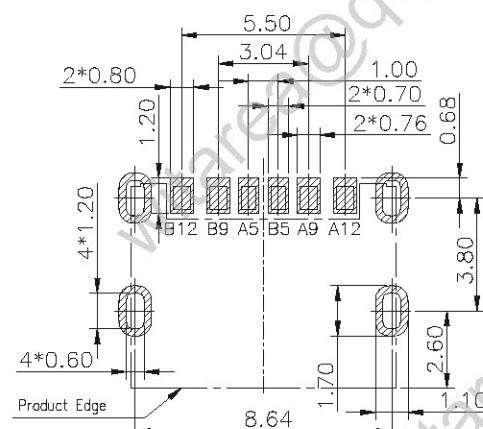
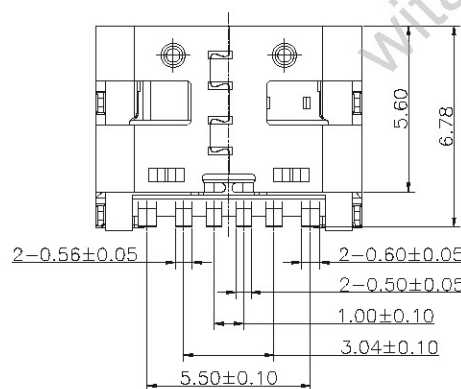
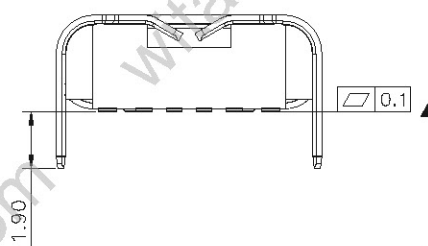
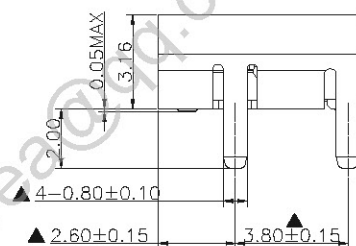
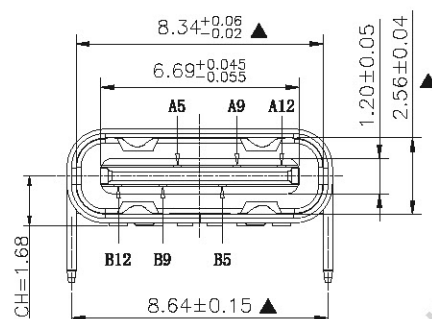





RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

TYPE:

4	SHELL	SUS T=0.30mm	NICKEL 30u" MIN PLATING	1PCS	
3	LATCH	SUS T=0.15mm	---	1PCS	
2	CONTACT	C2680 T=0.20mm	NI 50u" MIN. UNDER PLATED OVER ALL. Au PLATED ON THE FUNCTIONAL AREA OF CONTACT. PLATING OF THE SOLDER AREA (SEE THE PART NUMBER CODE)	2SET	
1	HOUSING	LCP UL94V-0	BLACK	1PCS	
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY	

PART NO.:
SEE THE PART NUMBER CODE

深圳市纬域科技有限公司
SHENZHEN WITAREA TECHNOLOGY CO., LTD

DRAWN BY	DATE
ANDY YANG	2022.09.19

CHECKED BY	DATE
JAMES XIAO	2022.09.19

APPROVED BY	DATE
JASON ZENG	2022.09.19

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)
$\nabla = 0$	$\pm$ ---
$\nabla = 0.1$	$\pm$ 0.10
$\nabla = 0.2$	$\pm$ 0.20
$\nabla = 0.3$	$\pm$ 0.30
ANGULAR	$\pm$ ---

TITLE		
TYPE C 2.0 6PIN RECEPTACLE , TOP-MOUNT, SINGLE-ROW SMT, CH=1.68MM, L=6.8MM, STAKES=1.9MM		
DWG.NO.	W0026-6-TM1-S6	SHEET NO. 1 OF 1
DIMENSION STYLE MM ONLY	DESIGN UNITS METRIC	SCALE 1:1



THIRD ANGLE
PROJECTION

frame size: A4