


NOTE:

- Electrical Characteristics:
 - 1-1: Current Rating: 5A For Pin(A4,A9,B4,B9)
1.25A For Pin(B5)
0.25A For Others Pin
 - 1-2: VOLTAGE RATING:20V AC/DC,
 - 1-3: Insulation Resistance: 100MΩ Min.
 - 1-4: Contact Resistance:
VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.
SHIELD:50mΩ/MAX.
SHIELD:LLCR MAX. CHANGE OF ALL PINS: 10mΩ.
 - 1-5: Dielectric Withstanding Voltage: 100V/AC 1Minute
- Mechanical Characteristics:
 - Insertion Force: 5~20N
 - Extraction Force: Initial: 8~20N
After durability: 6~20N
 - Durability :10000 Cycles
- Operating Temperature: -30°C TO +85°C
- 环境性能:
 - 盐雾喷雾72H Min
 - 产品需过IR炉, 温度260°C, 10分钟;
- 8." * "为重点管制尺寸," ■ "为CPK管制尺寸," ◎ "为FAI管制尺寸.

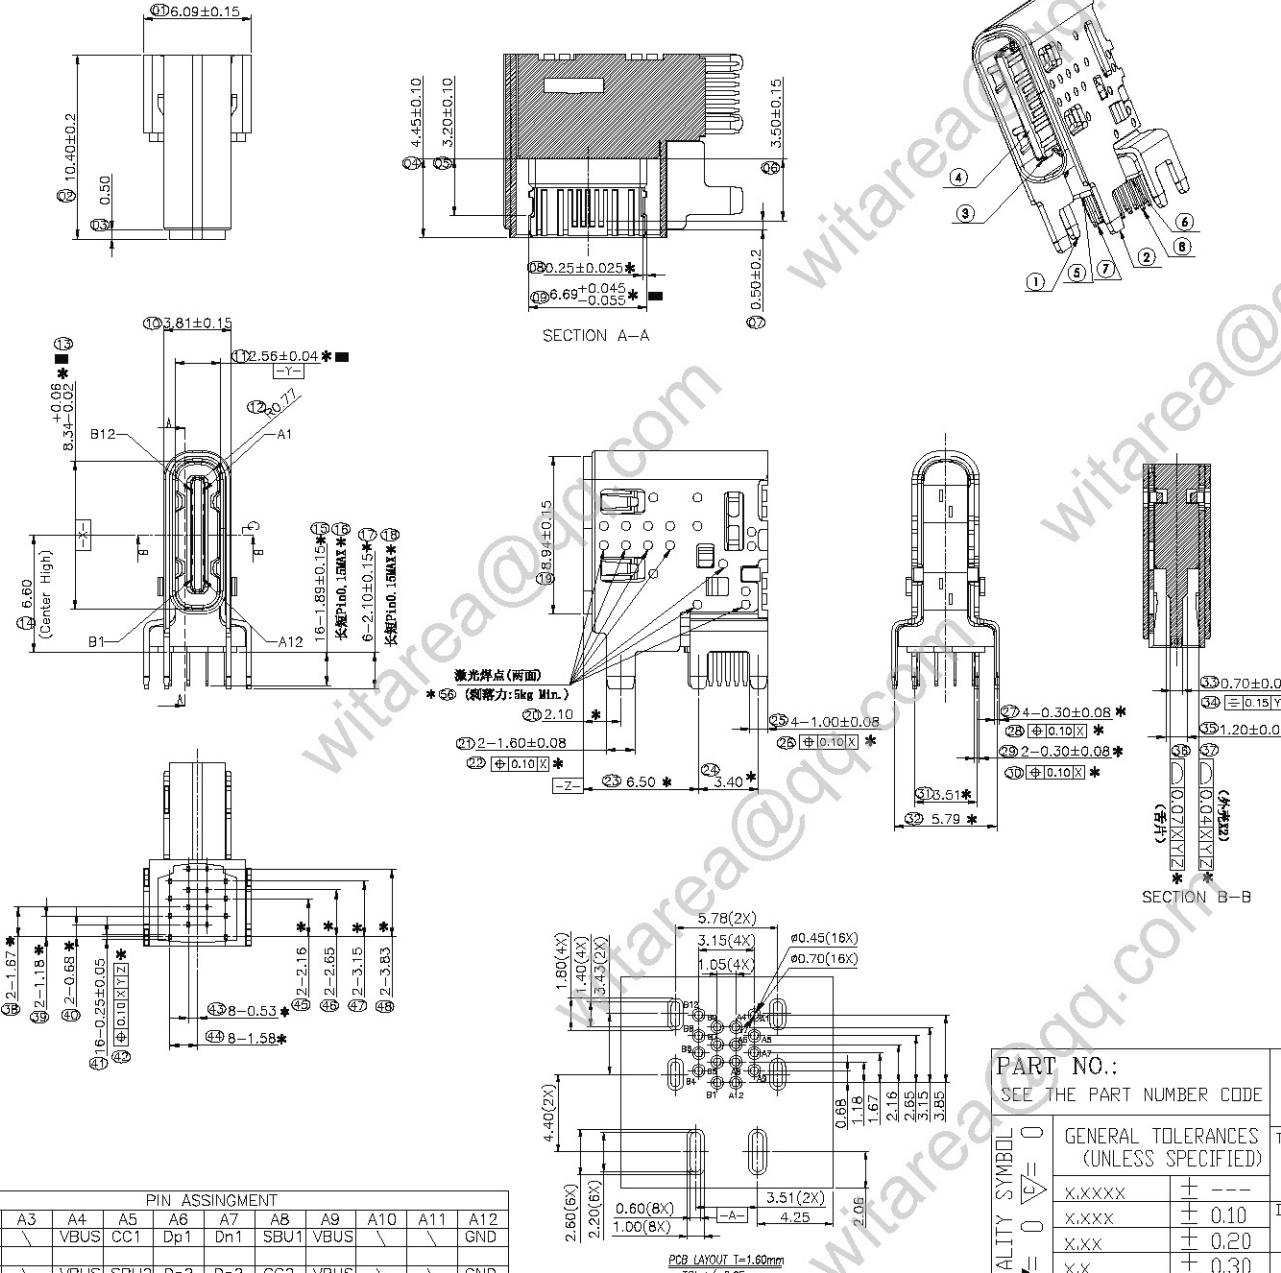

⑧ 上排端子	12		C7025-TM03,T=0.15	镀层:80~200u", 镀层区: 镀金12u", 镀金2u"Min, 非镀区: 镀金2u"Min,
⑦ 下排端子	12			
⑥ 上排Moding	1		PA46 HFX33S UL94 V-0	黑色/白色
⑤ 下排Moding	1			
④ 二次Moding	1			
③ 中夹片	1		SUS301R-H,T=0.20	整体镀镍40~200u", 盐雾72H
② 内壳	1		SUS304-1/2H,T=0.30	整体镀镍40~200u", 盐雾72H
① 外壳	1		SUS304-1/2H,T=0.30	整体镀镍40~200u", 盐雾72H
NO. 品名	数量	料号	材质	表面处理

PART NO.:
SEE THE PART NUMBER CODE

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)
X.XXXXX	± ---
X.XXX	± 0.10
X.XX	± 0.20
X.X	± 0.30
ANGULAR	± --°

深圳市纬域科技有限公司 SHENZHEN WITAREA TECHNOLOGY CO., LTD		DRAWN BY ANDY YANG		DATE 2021.08.24	
TITLE TYPE C 2.0 16PIN RECEPTACLE , FLAG-MOUNT, 4 ROWS DIP, WITH BRACKET, CH=6.6MM, L=10.4MM		CHECKED BY JAMES XIAD		DATE 2021.08.24	
DWG.NO. W0026-16-FM2-S11		APPROVED BY JASON ZENG		DATE 2021.08.24	
DIMENSION STYLE MM ONLY		DESIGN UNITS METRIC		SCALE 1:1	
		SHEET NO. 1 OF 1			

THIRD ANGLE PROJECTION	
---------------------------	--