
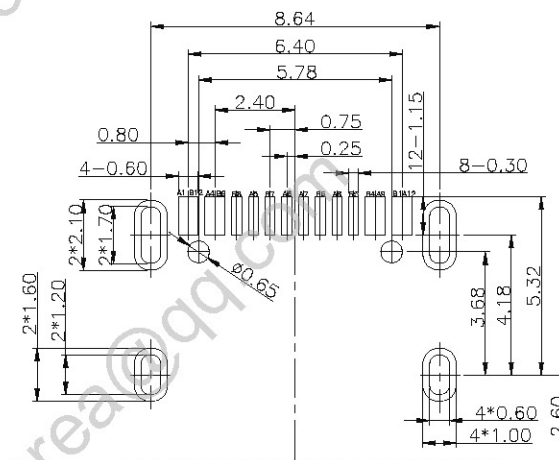
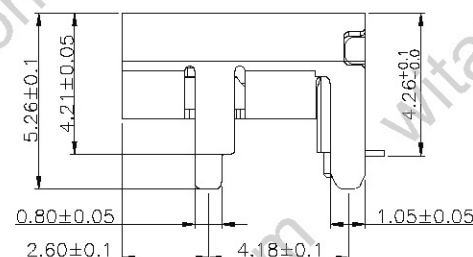
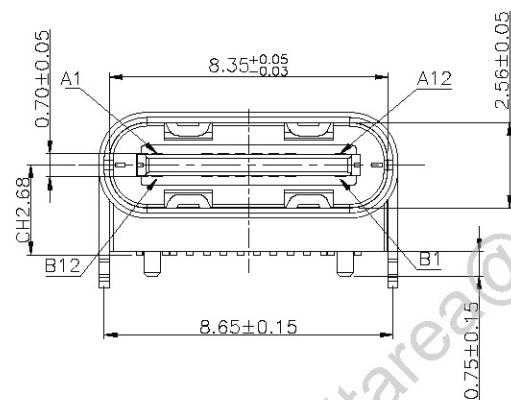
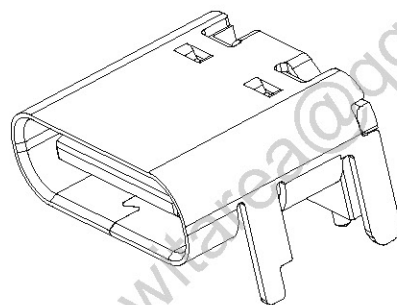
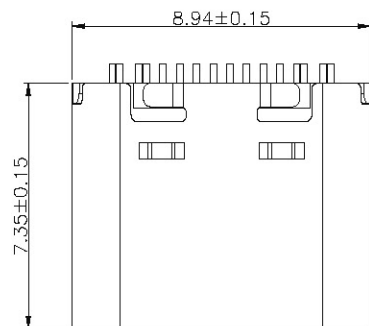


NOTES:
SPECIFICATION:

1. CURRENT RATING: 5A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

CONNECTOR
FRONT EDGE

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

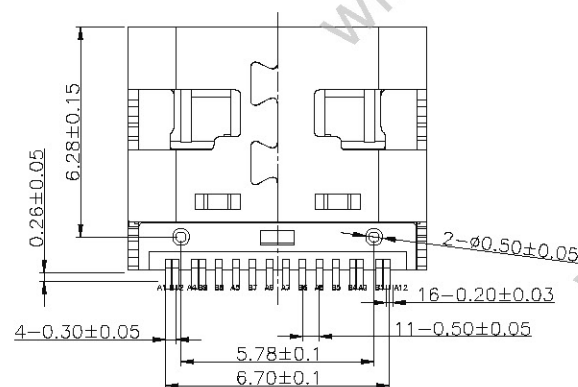

TYPE:

CF193-16SLB01R-D4	6	SHELL	STAINLESS STEEL	NI/SN Plated	1PCS
	5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
	4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
	3	CONTACT	COPPER ALLOY	Au/NI Plated/Tin	1SET
	2	CONTACT	COPPER ALLOY	Au/NI Plated/Tin	1SET
	1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
PART NO.	NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	GC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CG2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

PART NO.:
SEE THE PART NUMBER CODE

QUALITY	SYMBOL
▼ = 0	▽ = 0

GENERAL TOLERANCES
(UNLESS SPECIFIED)

X,XXXX	$\pm$ ---
X,XXX	$\pm$ 0.10
X,XX	$\pm$ 0.25
X,X	$\pm$ 0.30
ANGLE AP	$\pm$ --'

深圳市纬域科技有限公司
 HENZHEN WITAREA TECHNOLOGY CO., LTD

TITLE	TYPE C 2.0 16PIN RECEPTACLE , TOP-MOUNT, SINGLE ROW SMT, CH=2.68MM,L=7.35MM
-------	--

DWG.NO.	W0026-16-TM1-S10
---------	------------------

DIMENSION STYLE
MM ONLY

DESIGN UNITS
METRIC

SHEET NO.
1 OF 2

SCALE
1:1

DRAWN BY	DATE
ANDY YANG	2021.07.05

CHECKED BY	DATE
JAMES XIAO	2021.07.05

APPROVED BY	DATE
JASON ZENG	2021.07.05



THIRD ANGLE
PROJECTION

frame size: A4