

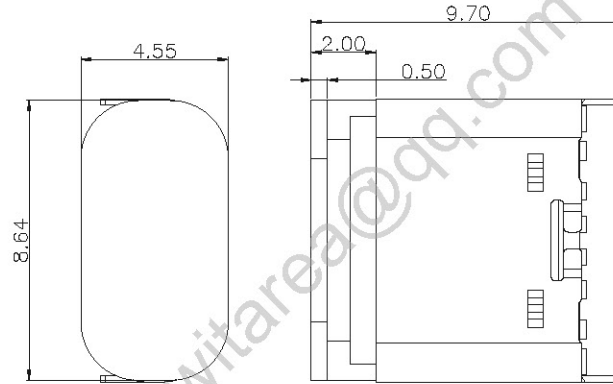


加塞子示意图

REV	ECN No.	DATE	REMARK
A	NEW	2019.05.30	NEW RELEASE

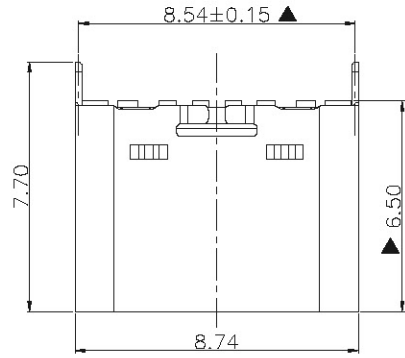






加塞子示意图

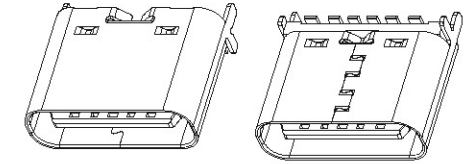

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10000 CYCLES
9. 注: 带“▲”号的为重点管控尺寸

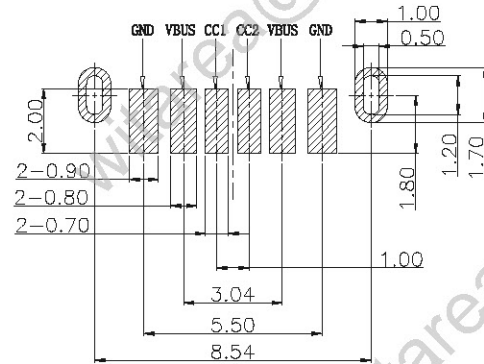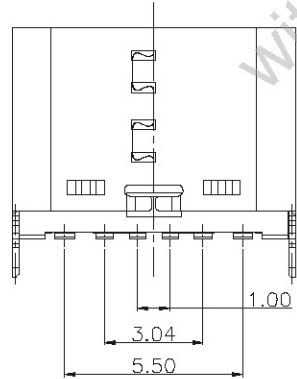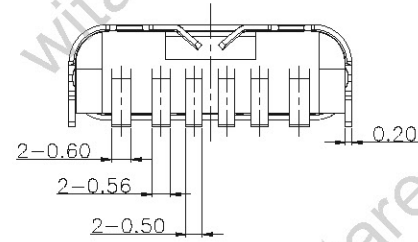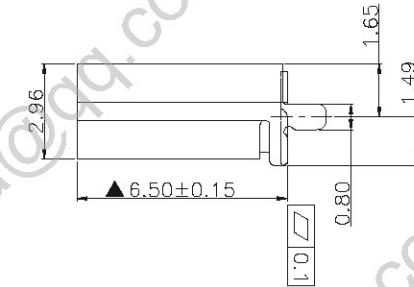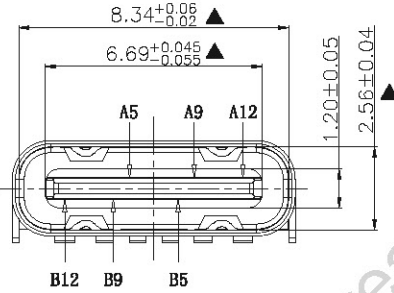

RECOMMEND P.C.B LAYOUT

TOLERANCE UNSPECIFIED ±0.05mm

TABLE:

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
5	COVER	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
4	SHIELDING PLATE	STAINLESS STEEL SUS301 t=0.15	NO Plated	1PCS
3	SHELL	STAINLESS STEEL SUS304 t=0.20	Ni: 50u" Plated	1PCS
2	CONTACT	COPPER ALLOY C2680 T=0.20	Au1u"/Ni: 50u" Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	LCP UL94V-0 BLACK	1PCS

PART NO.:

SEE THE PART NUMBER CODE

深圳市纬域科技有限公司

SHENZHEN WITAREA TECHNOLOGY CO.,LTD

DRAWN BY ANDY YANG DATE 2022.09.19

CHECKED BY JAMES XIAD DATE 2022.09.19

APPROVED BY JASON ZENG DATE 2022.09.19

TITLE TYPE C 2.0 6PIN RECEPTACLE , VERTICAL-MOUNT, SINGLE-ROW SMT, H=6.5MM, L=6.5MM

DWG.NO. W0026-6-VM1-S4

SHEET NO. 1 OF 2

DIMENSION STYLE MM ONLY



DESIGN UNITS METRIC

SCALE 1:1

THIRD ANGLE PROJECTION

USB TYPE C PIN ASSIGNMENTS

PIN	SIGNAL NAME	PIN	SIGNAL NAME
A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2

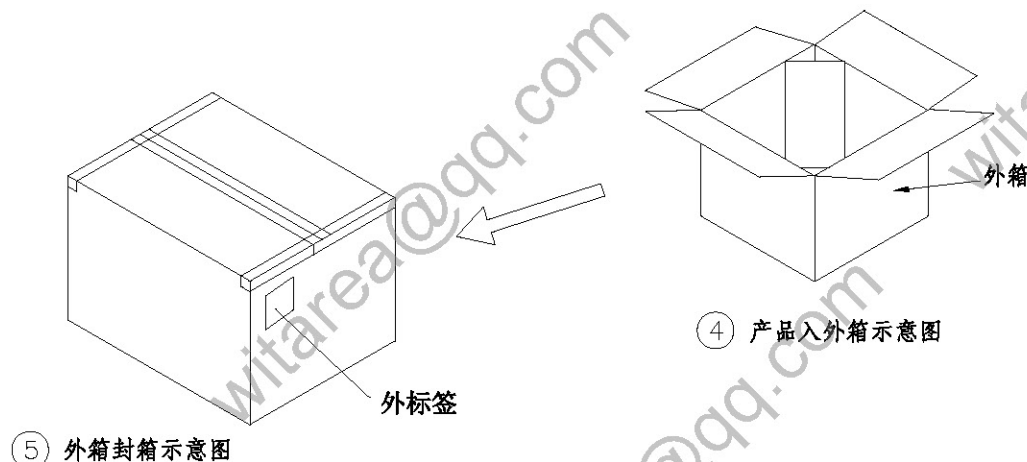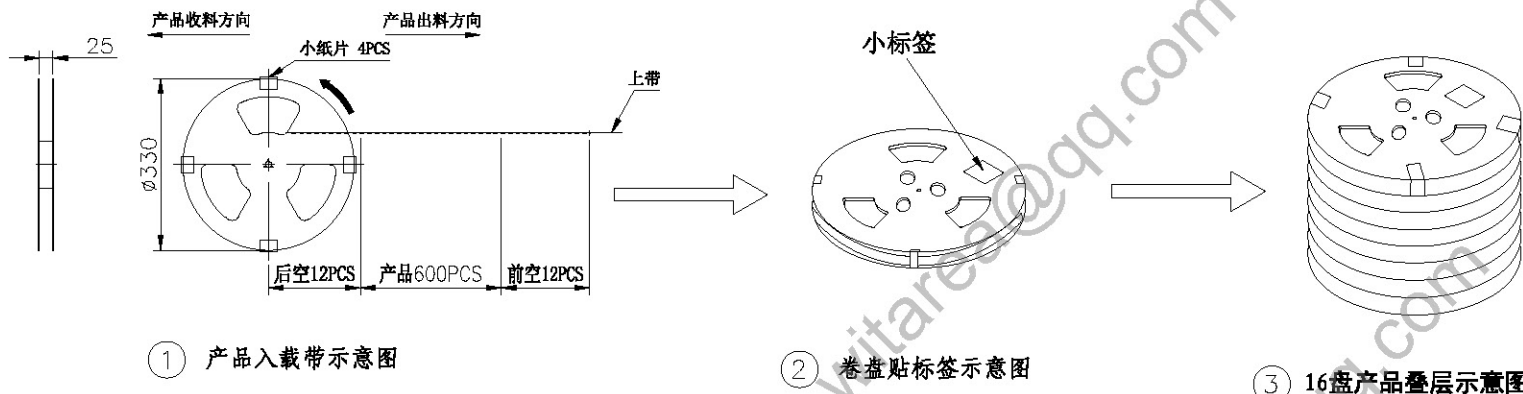

NOTE:

1. QUANTITY/REEL: 600 PCS
数量/卷: 600 PCS
QUANTITY/INNER CARTON: 600 X 10 = 6000 PCS
数量/箱: 600 X 10 = 6000 PCS
2. FREE 12 CAVE IN THE FRONT CARRIER AND FREE 12 CAVE IN THE END CARRIER.
包装带内圈空12格, 外圈空12格.

ITEM	DESC.	MATERIAL	REMARKS	QTY
1	成品		C TYPE母座成品	6000
2	CARRIER TAPE	PET	W=24mm T=0.50mm	10
3	COVER TAPE	PET	W=21.3mm T=0.05mm	10
4	小标签		L102mm*W59mm	10
5	卷盘	PS	φ330MM*W28.5MM	10
6	天地板	K3K	L320mm*W320mm	2
7	外标签		L102mm*W102mm	1
8	三角柱	K=K	L300mm*W210mm	4
9	外箱	A=A	L330mm*W330mm*320mm	1

W	24.00±0.30	P	12.00±0.10	A0	3.39±0.10	B0	9.04±0.10
S	0.00±0.10	P0	4.00±0.10	A1		B1	
E	1.75±0.10	P2	2.00±0.10			B2	
F	11.50±0.10	D0	φ1.50 ± 0.10	K0	9.80±0.10	K1	
T	0.50±0.05	D1					

PART NO.:
SEE THE PART NUMBER CODE

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)
X.XXXXX	± 0.10
X.XXX	± 0.25
X.XX	± 0.30
X.X	± 0.40
ANGULAR	± 0.50

深圳市纬域科技有限公司 SHENZHEN WITAREA TECHNOLOGY CO., LTD		DRAWN BY ANDY YANG	DATE 2019.07.09
TITLE TYPE C 2.0 6PIN RECEPTACLE, VERTICAL-MOUNT, SINGLE-ROW SMT, H=6.5MM, L=6.5MM		CHECKED BY JAMES XIAD	DATE 2019.07.09
DWG.NO. W0026-6-VM1-S4	SHEET NO. 2 OF 2	APPROVED BY JASON ZENG	DATE 2019.07.09
DIMENSION STYLE MM ONLY	DESIGN UNITS METRIC	SCALE 1:1	THIRD ANGLE PROJECTION